
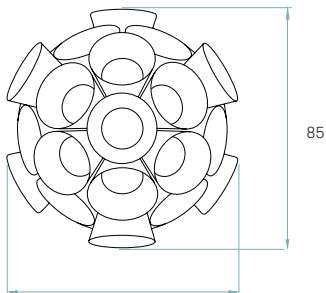


LED Dandelion

by Burkhard Dämmer

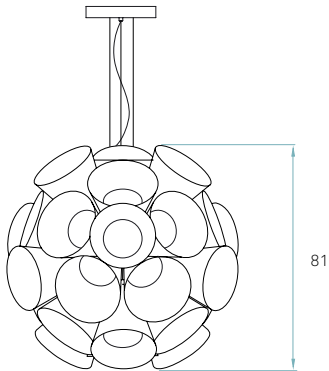

85

References



DDLN S LED DIM0-10V



DDLN S LED DIMBT

Certificates



Class I

120V - 277V

Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate

Components



Metal canopy
Brushed Nickel
ø 28 cm

Electrical cable
Transparent 2 m drop



Steel cable
3 x 2 m drop



Diffuser
Matt satin acrylic



Required
Shade mount required
Difficulty: ****



LED
 COB
31 x 4 W 135 mA

Energy class

A+
LED integrated
Not replaceable



Driver
MEANWELL
2 units - Ref. NPF 60D-30
+
Bluetooth Control - CASAMBI
1 unit - Ref. CBU - ASD
Driver housed in canopy.

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120V-277V	3362 lm	90	120 W	3000 °K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White

