






Form here follows technique, with the design of the Link taking its cue from methods used for shaping and bending, which offer a strong three dimensionality.

The "link" is a metal element joining the backrest's two wings, while the slot in the backrest gives the chair a light, airy feel. In wooden models, the oblique grain, which has an almost graphic quality, recalls the veins of a leaf, reinforcing the chair's natural appearance.

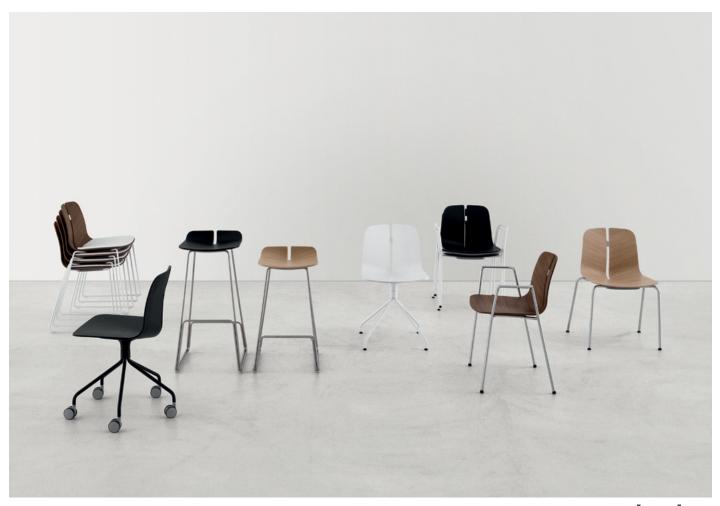










With or without arms, frame of either 4 legs, four star base or castors on five star base both with swivel or sled base, it can be stacked for large-scale use and storage, or linked in rows for meeting and conference rooms. The curved plywood shell is available in several finishes with a seat pad as option. The base can be mat chromed or powder coated with glides in polythene with felt. This seating program includes a fix height stool.

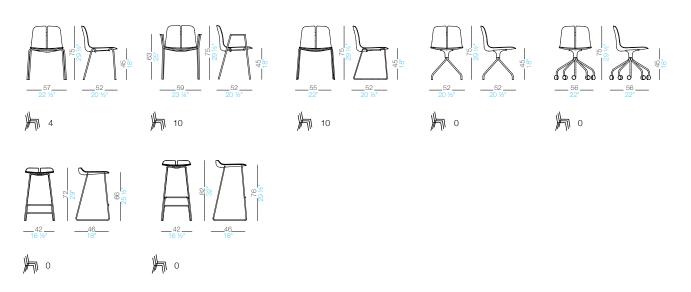

Test EN 1728/2000 - 15373/200/ 3 SEVERE



consult the porfolio for the range of colors, fabrics, soft-leather.

use and maintenance instructions

Clean all parts in wood, leather, fabric and metal with a damp cloth or a diluted neutral cleaner. Do not use cleaners with alcohol, bleach, solvent or abrasive products. Any liquid spilt on the product must be wiped up immediately. When lifting or moving the product, hold it on the structure and not under the seat. The product should not be subjected to unbalanced weights, as it is designed for a proper rest on the foothold (on four legs or on the base). Our company relieves from any responsibility in case of damage caused to fragile floors. Avoid any improper use of the product: do not step on the product, on the footrest or on the armrests. Avoid any movements that could compromise the proper functionality of the product or the safety of the users. Wood and leather, being natural materials, could be easily damaged. Small impurities or imperfections are within quality standard range. Do not expose the product to weather conditions or atmospheric agents, nor to heat sources over 45°C. Also products for outdoor use could be afflicted by atmospheric agents. The product could undergo possible exterior changes due to particular exposure to heat, humidity and saltiness. An appropriate and frequent maintenance and cleaning of the product enhances its durability. The product could change colour and shade, if exposed to direct sunlight. Maintenance has to be carried out by experienced staff. Dispose of the package only after assembling the product, in order to avoid the loss of ironmongery and components. Once the product has been dismantled, the product itself or its components must be given to the public garbage disposal system, according to the legislation in force.