

MEDIUM SUSPENSION / **Saturnia LED**
by Oskar Cerezo

References



SAT SM LED DIM0-10V



SAT SM LED DIMBT

Certificates



Class I

120V - 277V

Wood shade colors

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate



Components



Top diffuser

Black or White

The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser

Matt satin acrylic



Metal canopy

Brushed Nickel
ø 23 cm


Electrical cable

Transparent 2 m drop



Steel cable

3 x 2 m drop

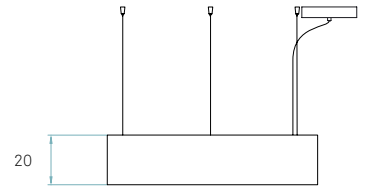

LED



Linear Module
6 x 8,1 W 700 mA




Driver

MEANWELL
1 unit - Ref. NPF 60D-42
+
Bluetooth Control - CASAMBI
1 unit - Ref. CBU - ASD

Driver housed in canopy.

Energy class

A+
LED integrated
Not replaceable

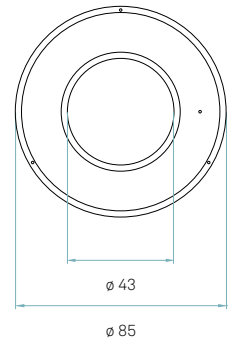

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120V-277V	3894 lm	90	57 W	3000 °K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White

