

References



SPRO SM 21 LED DIM0-10V  
SPRO SM 26 LED DIM0-10V



SPRO SM 21 LED DIMBT  
SPRO SM 26 LED DIMBT

Certificates



Class I  
120V - 277V

Spirals colors \*

- 21 Natural Cherry
- 26 Red

\* Additional colors available on request

**Wood Outer shell**  
Natural wood colors

- 21 Natural Cherry opaque
- 26 Red tulip poplar opaque

Awards



HD Las Vegas 2012



Components



**Top diffuser**  
Black or White

The standard top diffuser is white. Black is also available if you want no upward light diffusion.

**Bottom diffuser**  
Transparent acrylic




**Metal canopy**  
Brushed Nickel  
ø 23 cm

**Electrical cable**  
Transparent 2 m drop



**Steel cable**  
4 x 2 m drop

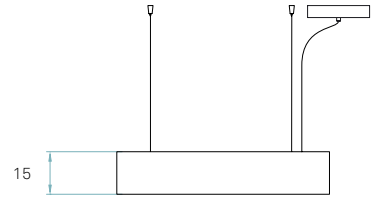

**LED**



Linear Module  
10 x 5,5 W 350 mA




**Driver**

MEANWELL  
1 unit - Ref. NPF 60D-36  
+  
Bluetooth Control - CASAMBI  
1 unit - Ref. CBU - ASD

Driver housed in canopy.

**Energy class**

A+  
LED integrated  
Not replaceable



Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120V-277V	912 lm	90	60 W	3000 °K	40000h

\* Measurements taken using white shades, Veneer Ref: 21 Natural Cherry

